

# PLUGS

## M61-




Plug:	<b>BIPOLAR "SCHUKO"</b> <b>2 poles</b>
Rated voltage:	<b>250 V</b>
Rated current:	<b>16 A C.A.</b>
Insulation class:	<b>I</b>
Type of clamps for cables connection:	<b>CRIMPED CLAMPS</b>
Cable exit:	<b>AXIAL</b>
Protection degree:	<b>IP20</b>
In conformity to the standards:	<b>CEI 23-50</b>
Approval marks:	<b>IMQ</b> (only for the harmonized cables)



- Tables of the cables connected to the plug:

Transparent plug version, without IMQ approval:

Insulation	Shape	Sections	Temperature	Type	cod./page
PVC + PVC TRANSPARENT	flat	2 x 0,75 mm <sup>2</sup>	T70°C	FRDR	RSP7T (page 9057)
PVC + PVC TRANSPARENT	flat	2 x 0,75 mm <sup>2</sup>	T70°C	FRDR	RBP7T (page 9056)
PVC + PVC TRANSPARENT	round	2 x 0,75 mm <sup>2</sup>	T70°C	FROR	RS27T (page 9057)
FEP + PVC TRANSPARENT	flat	2 x 0,75 mm <sup>2</sup>	T70°C (T180°C cores)	FR5FDR	BSP7T (page 9063)
FEP + PVC TRANSPARENT	round	2 x 0,75 mm <sup>2</sup>	T70°C (T180°C cores)	FR5FOR	BS27T (page 9063)

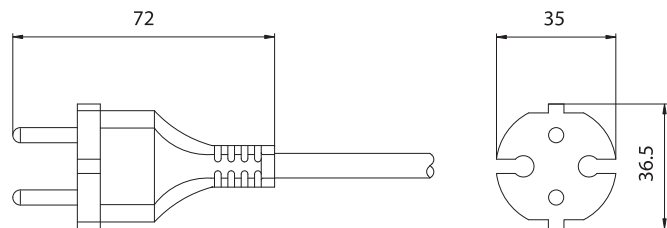

Coloured plug version, with IMQ approval:

Insulation	Shape	Sections	Temperature	Type	cod./page
PVC + PVC B - N - E	flat	2 x 0,75 mm <sup>2</sup>	T70°C	H03WH2-F	RRP7- (page 9053)
PVC + PVC B - N - E	round	2 x 0,75 mm <sup>2</sup>	T70°C	H03W-F	RR27- (page 9053)

- Body in injected thermoplastic PVC.  
Nickel-plated brass contacts.

- Table of the available colours:

**T** = transparent  
**B** = white  
**N** = black  
**E** = grey  
 - Other colours on request.

