

PLUGS

M62-

1998



Plug: **“EUROPEAN” BIPOLAR**
2 poles

Rated voltage: **250 V**
Rated current: **2,5 A**
Insulation class: **II**

Type of clamps for cables connection: **CRIMPED CLAMPS**
Cable exit: **AXIAL**
Protection degree: **IP20**
In conformity to the standards: **EN 50075**


Approval marks: **ENEC 03**
(for the harmonized cables)
IMQ
(for the transparent cables)



- Tables of the cables connected to the plug:

Transparent plug version, with IMQ approval:

Insulation	Shape	Sections	Temperature	Type	cod./page
PVC + PVC TRANSPARENT	flat	2 x 0,75 mm ²	T70°C	FRDR	RSP7T (page 9057) RBP7T (page 9056)
PVC + PVC TRANSPARENT	round	2 x 0,75 mm ²	T70°C	FROR	RS27T (page 9057) RB27T (page 9056)
FEP + PVC TRANSPARENT	flat	2 x 0,75 mm ²	T70°C (T180°C cores)	FR5FDR	BSP7T (page 9063)
FEP + PVC TRANSPARENT	round	2 x 0,75 mm ²	T70°C (T180°C cores)	FR5FOR	BS27T (page 9063)
FEP + PVC TRANSPARENT	round	2 x 0,75 mm ²	T70°C (T180°C cores)	FR5FOR	BZ27T (page 9069)

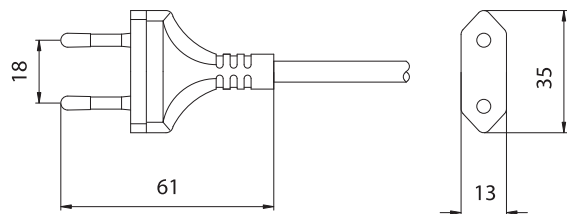

- Body in injected thermoplastic PVC.
Nickel-plated brass contacts.

Coloured plug version, with ENEC approval:

Insulation	Shape	Sections	Temperature	Type	cod./page
PVC + PVC B - N - E	flat	2 x 0,75 mm ²	T70°C	H03WH2-F	RRP7- (page 9053)
PVC + PVC B - N - E	round	2 x 0,75 mm ²	T70°C	H03W-F	RR27- (page 9053)
PVC + PVC B - N - E	flat	2 x 0,75 mm ²	T90°C	H03V2/2H2-F	RHP7- (page 9052)
PVC + PVC B - N - E	round	2 x 0,75 mm ²	T90°C	H03V2/2F	RH27- (page 9052)
PVC + PVC B - N - E	round	2 x 0,75 mm ²	T70°C	H05W-F	RC27- (page 9055)
PVC + PVC B - N - E	flat	2 x 0,75 mm ²	T70°C	H05WH2-F	RCP7- (page 9055)

- Table of the available colours:

T = transparent

B = white

N = black

E = grey

- Other colours on request.

Note: it is possible supply the plug with already connected cables and switches.

