

PLUGS

M76-

Plug:

**“SCHUKO ANTISPLASH”
2 poles**

Rated voltage:

250 V

Rated current:

16 A C.A.

Insulation class:

II

Type of clamps for
cables connection:

CRIMPED CLAMPS

Cable exit:

AXIAL

Protection degree:

IP44

In conformity to the standards:


CEI 23-50

Approval marks:



- Table of the cables connected to the plug:

Insulation	Shape	Sections	Temperature	Type	cod./page
NEOPRENE + NEOPRENE	round	2 x 0,75 mm ²	T60°C	H05RN-F	NC27- (page 9048)
NEOPRENE + NEOPRENE	round	2 x 1,00 mm ²	T60°C	H05RN-F	NC21- (page 9048)
NEOPRENE + NEOPRENE	round	2 x 1,00 mm ²	T60°C	H07RN-F	NN21- (page 9049)
NEOPRENE + NEOPRENE	round	2 x 1,50 mm ²	T60°C	H07RN-F	NN25- (page 9049)

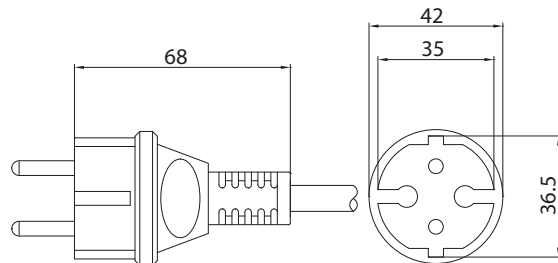

- Body in injected thermoplastic PVC.
Nickel-plated brass contacts.

- Table of the available colours:
N = black
- Other colours on request.

