

# MULTI-CONDUCTOR CABLES INSULATED IN SILICONE T180°C + RUBBER PCP T70°C

**NS---**

2004

**CE**


**Type of insulation:** **SILICONE + RUBBER PCP (polychloroprene)**

**Working temperature:** **T 70°C (T 90°C ♦) for the sheath**  
**T 180°C for the cores**

**Type of conductor:** **TIN-PLATED COPPER**  
**Working voltage:** **300/500 V**

**In conformity to the requirements of the directives:** **2006/95/EC**

**Approval marks, of the cores:** **VDE REG. Nr.**

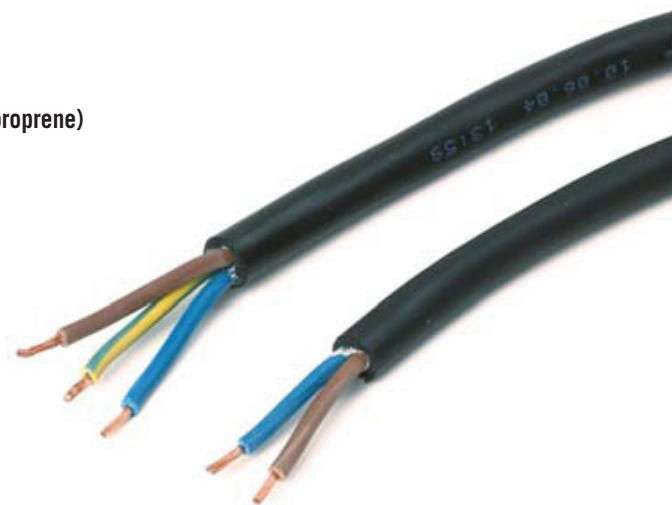

• Sections and multiple table of the cores:


Code	Sections mm <sup>2</sup>	Conductor strand	Cores colours*	Shape	Dimension ±0,2 mm
<b>NS21N</b>	2 x 1,00	32 x 0,20	l m	round	ø 8,3
<b>NS31N</b>	3 x 1,00	32 x 0,20	l m g	round	ø 8,9
<b>NS25N</b>	2 x 1,50	30 x 0,25	l m	round	ø 9,3
<b>NS35N</b>	3 x 1,50	30 x 0,25	l m g	round	ø 10,0

• Other sections on request.

\* Colours table of the cores:

l = blue                      m = brown                      g = yellow/green

♦ T90°C for applications subjected to EN60598.

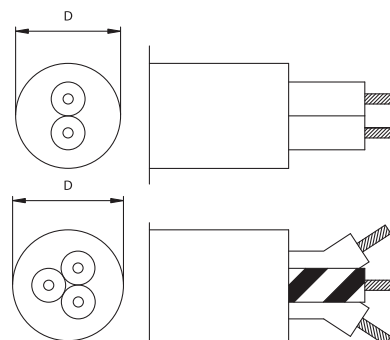

• VDE REG. Nr. approval printing on the cores under the external sheath.

• Table of available colours:

**N** = black

- Other colours on request.

